




FOAM TOTE TRAILERS



Dual Tote Trailer

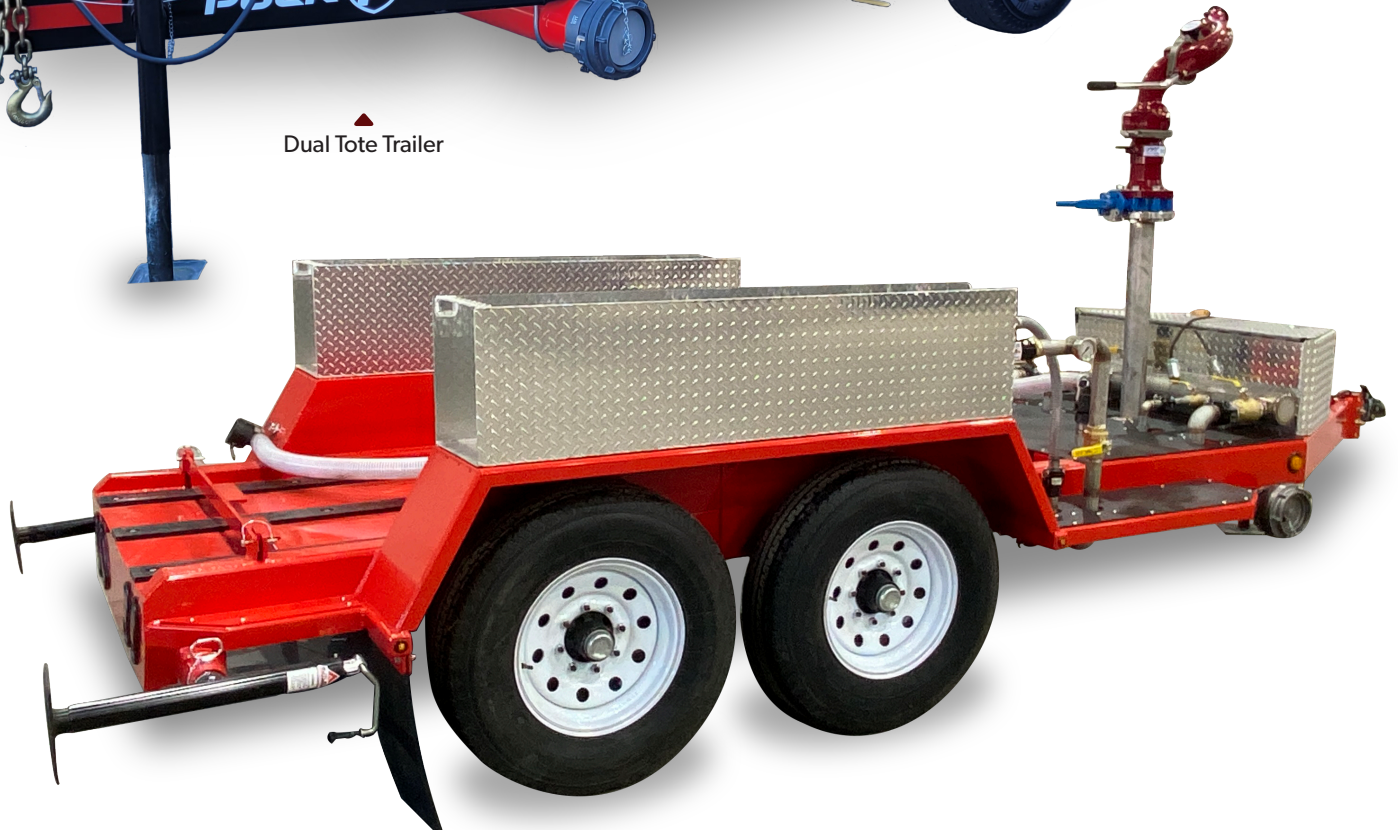

A New Approach to Bringing Water to the Fire





DUAL TOTE TRAILERS


Deploy foam concentrate for faster suppression

Puck Fire Foam Tote Trailers provide storage capacity for large volumes of foam concentrate, while also providing high performance foam delivery utilizing a 4" waterway feeding into a 3" riser-pipe, creating the ultimate firefighting package. Puck Fire Foam Tote Trailers are compatible with both 275 gallon and 660 gallon foam totes. This versatile foam tote trailer provides you with a portable solution to add flexibility, ease of use, and rapid deployment capabilities to your firefighting arsenal.

APPLICATIONS OF USE

Puck Fire Foam Tote Trailers can rapidly be placed into service on scene of a major flammable liquid incident. These trailers feature monitor pipework on each side of the trailer, adding flexibility to scene setup. Puck Fire Foam Tote Trailers provide a more efficient foam delivery solution compared to foam tankers or drums/pail delivery setups.

FOAM TOTE TRAILER FEATURES

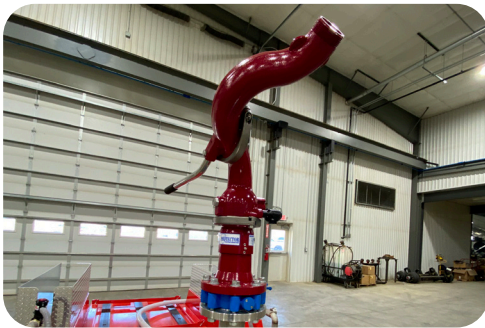

NOZZLE

- ✓ Flow rates from 500, 750, 1,000 or 1,250 GPM configurations
- ✓ The waterway allows 360° rotation and minimizes friction loss for the most efficient flow



STABILIZATION

- ✓ 5,000 lb capacity tongue mounted jack
- ✓ Dual 5,000 lb capacity rear jacks mounted behind the rear axle



MONITOR

- ✓ Pre-piped single waterway aluminum monitor with flow rates up to 1,250 gallons per minute
- ✓ Stream shape adjustability from straight to fog pattern




FOAM CONCENTRATE STORAGE

- ✓ 275-1,980 gallons foam concentrate storage capacity utilizing 275 or 660 gallon foam totes
- ✓ Shipped without totes. Empty totes are available upon request



FIXED WATERWAY

- ✓ 5" Storz connections on each side for feeding the waterway system
- ✓ 2-1/2" U.S. Coupling Gate Valves on each side of the riser-pipe

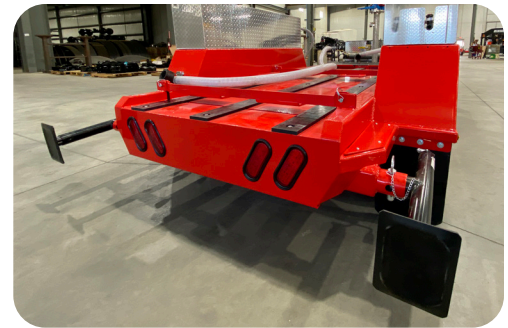

FOAM PIPING

- ✓ Built for long service life with stainless steel piping
- ✓ Quick Connect Cam Lock connectors with short flexible hoses are used to connect foam totes to the main waterway for quick and easy changeover



A New Approach to Bringing Water to the Fire



Foam Tote Trailer Specifications

FOAM TOTE TRAILER MODEL COMPARISON

Model Number
Single Tote Trailer
Dual Tote Trailer
Dual Tote Trailer with Dry Chemical
Triple Tote Trailer
Six Tote Trailer with 4" Form Truck Line

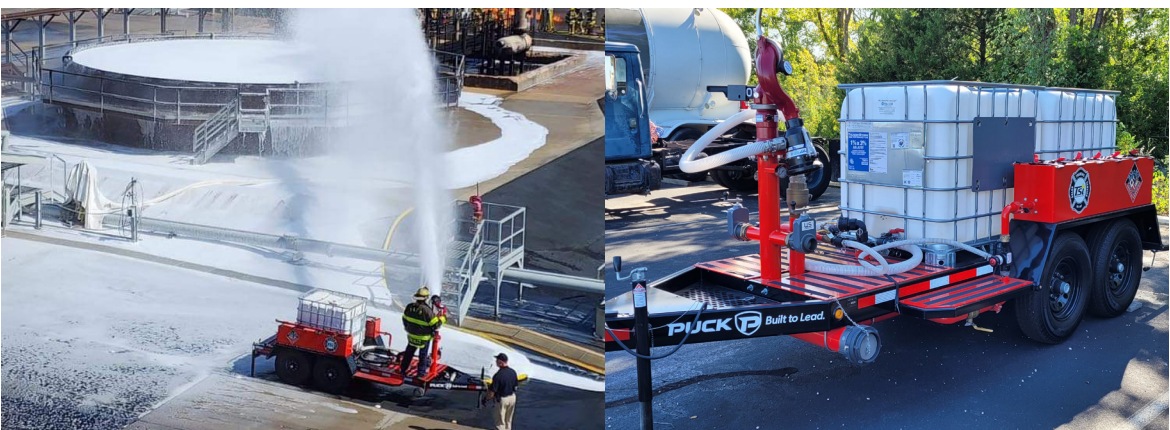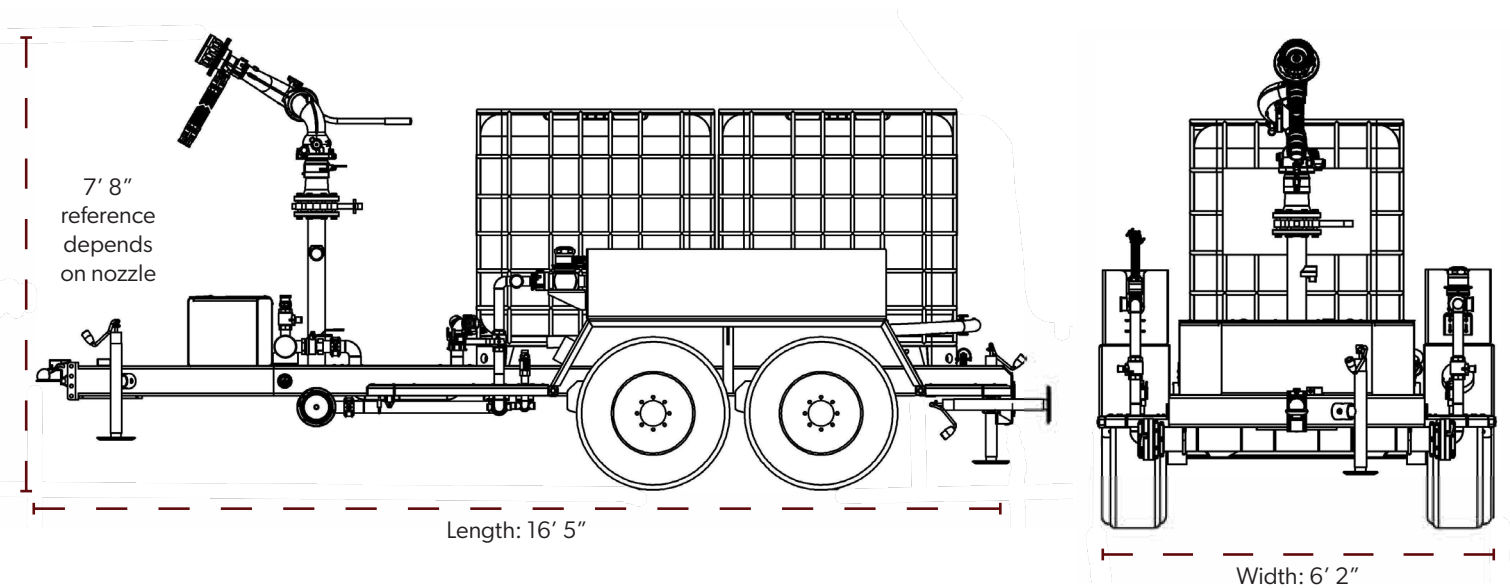

View the entire lineup at
puck.com/puck-fire
to learn more.

A New Approach to Bringing Water to the Fire





Gallery



Our products can bring you solutions from water source to nozzle.



A New Approach to Bringing Water to the Fire

